
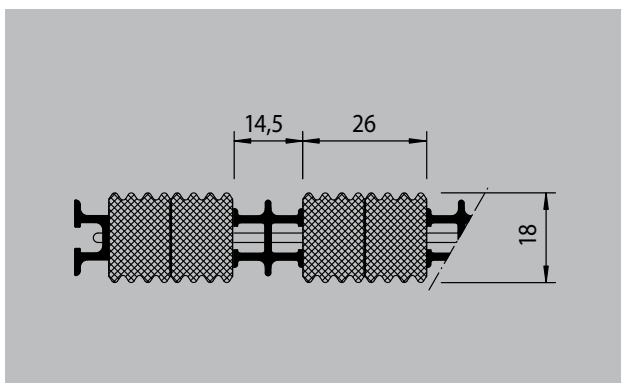


Model 18 G DW

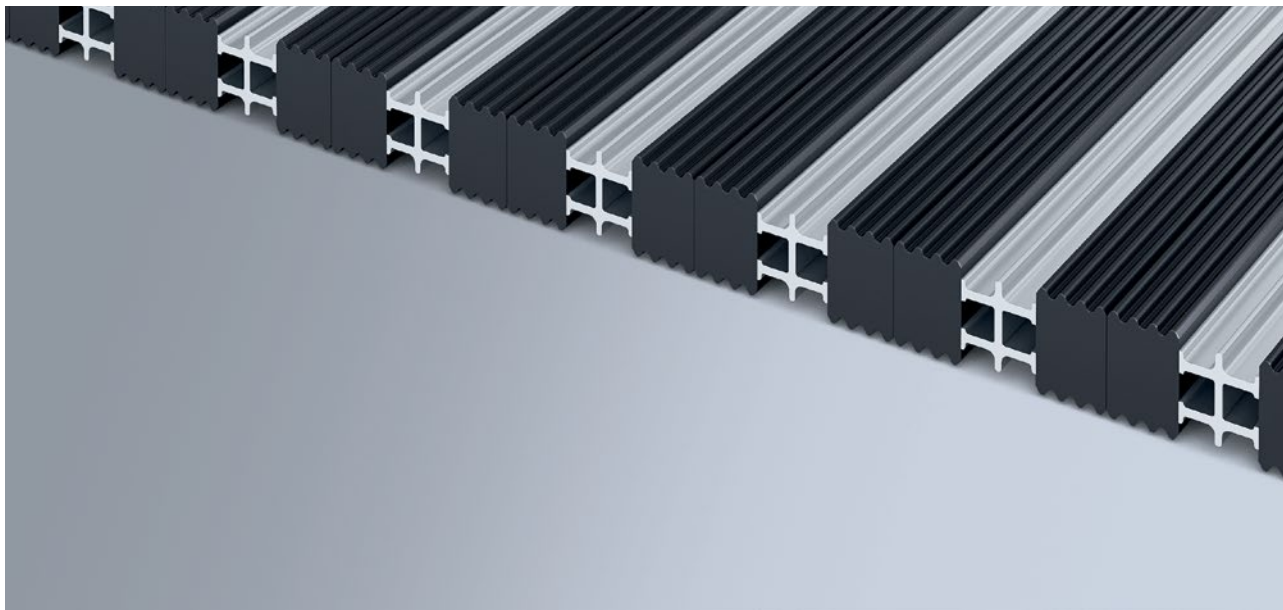

1

2

3

Outside (Zone 1)

Description

An all-in-one, extremely hard-wearing and reversible entrance mat for laying on top of flooring. Customisable widths and walking depths available. Available in any geometric shape.



Outside
(Zone 1)



Street dust,
hair, sand,
ash, textile
fibres, small
leaves and
twigs, loose
chippings,
coarse sand,
small gravel
particles



Extremely
durable

Model 18 G DW

Roll-over and drive-over capability:	Wheelchairs Prams Light shopping trolleys hand trolleys Cars pallet trucks
Standard profile clearance approx. (mm)	0 mm, closed system
Connection	High-strength fibres
Mat division as per factory standards	from a profile length of 2000 mm, a mat walking depth of 800 mm or a maximum mat weight of 45 kg
Separator profile	High-quality solid rubber, weather-proof and abrasion-proof
Colour of Scraper profile	Aluminium as standard. Anodised in EV3 gold, C33 mid-bronze, C35 black or C31 stainless steel for an additional charge

Tread surface	Weather-proof solid rubber strips combined with aluminium scraping profiles in the ratio 2:1. Alternate profiles are connected with a steel wire that finishes inside a hollow aluminium profile at both ends.
Slip resistance	Checked product: 18G; slip-resistance R9 in accordance with DIN 51131
Flammability	Insert available on request (surcharge applicable) with fire classification Bfl-s1 according to EN 13501.

Accessories
emco installation frame 500: 500-20 AL Aluminium
emco installation frame 500: 500-20 CN Chrome-nickel steel (V2A)
emco T-profile: T17

Service and services
Construction site advice
Dimensioning

Model 18 G DW

Colours



Rubber

Subject to technical modifications

emco Bautechnik GmbH · Breslauer Straße 34 - 38 · D-49808 Lingen (Ems)
· Germany · Phone: +49 (0) 591/9140-500 · Fax: +49 (0) 591/9140-852 · Email:
bau@emco.de · www.emco-bau.com

