

## Model 18 NF



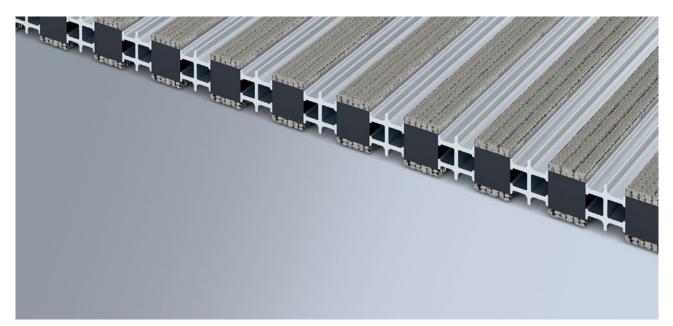



Indoor and outdoor (covered, Zone 1+2)

## Description

An all-in-one, extremely hard-wearing and reversible entrance mat for laying on top of flooring. Customisable widths and walking depths available. Available in any geometric shape.







Street dust, textile fibres, small leaves

Extremely hair, sand, ash, durable

and twigs, etc.



## Model 18 NF

Approx. height (mm)	18	Tread surface	Robust strips of nylon-pile rubber (covered on both sides with nylon fibres) combined with aluminium scraping profiles. Alternate profiles are connected with a steel wire that finishes inside a hollow aluminium profile at both ends.	
Roll-over and drive-over capability:	Wheelchairs Prams Light shopping trolleys			
	hand trolleys Cars	Slip resistance	Checked product: 18NF; slip-resistance R10 in accordance with DIN 51131	
	pallet trucks	Flammability	Insert available on request (surcharge applicable) with fire classification Cfl-s1 according to EN 13501.	
Standard profile clearance approx. (mm)	0 mm, closed system			
Connection	High-strength fibres	Accessories	Accessories	
Weight (kg/m²)	17,0	emco installation frame	emco installation frame 500: 500-20 AL Aluminium	
Mat division as per factory standards	from a profile length of 2000 mm, a mat walking depth of 800 mm or a maximum mat weight of 45 kg	emco installation frame 500: 500-20 CN Chrome-nickel steel (V2A)		
		emco T-profile: T17		
Separator profile	Nylon-pile rubber			
Colour of Scraper profile	Aluminium as standard. Anodised in EV3 gold, C33 mid-bronze, C35 black or C31 stainless steel for an additional charge	Service and services Construction site advice Dimensioning		




## Model 18 NF

Colours



grey



Zebra

Subject to technical modifications

emco Bautechnik GmbH · Breslauer Straße 34 - 38 · D-49808 Lingen (Ems) · Germany · Phone: +49 (0) 591/9140-500 · Fax: +49 (0) 591/9140-852 · Email: bau@emco.de · www.emco-bau.com

