

**UK CARES
Technical Approval**

CI/SIB	(29)	E16	
October 2018			




Ancon[®]

**Shearfix Punching
Shear Reinforcement**
for the Construction Industry

Punching Shear Reinforcement

Reinforcing Concrete Slabs at Column Heads

The weight of a slab supported on a column induces shear stresses in the slab. These stresses, if sufficient and where additional reinforcement has not been provided, would result in the column ‘punching’ through the slab. This punching shear is similarly induced in the footing on which the column bears.

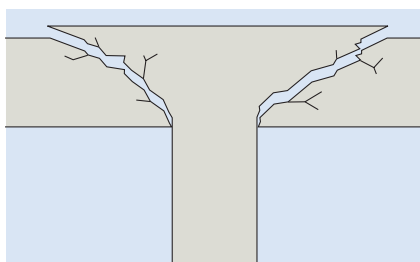

Although punching shear can be relieved by localised thickening of the concrete with downstand

beams and enlarged column heads, the construction of flat slabs offers many advantages. A consistent head space can reduce the overall height of a building and provide significant time and material savings.

Used within a slab to provide additional reinforcement around columns, Ancon Shearfix is the ideal solution to the design and construction problems associated with punching shear.

The system consists of double-headed studs welded to flat rails, positioned around the column head or base. The shear load from the slab is transferred through the studs into the column.



Contents

Ancon Shearfix	4	Design Program	8
Comparison with Shear Links	4	Typical Rail Arrangements	10
System Components	5	Installation Procedure	10
Design Information:		Applications	11
BS EN 1992 (Eurocode 2)	6	Other Ancon Products	11
Large and Elongated Columns	7		



Established, trusted
name in concrete
reinforcement



Free EC2 design
program &
technical support



BIM Objects
available



In-house manufacture
from CARES-approved
B500C rebar



Rounded rail ends
for safer handling



Full material
traceability



In-house, traceable
batch testing



Technical
Approval
TA7-5041



ISO 9001, ISO 14001
& OHSAS 18001



THE QUEEN'S AWARDS
FOR ENTERPRISE:
INNOVATION
2016

Ancon®

Shearfix Punching Shear Reinforcement

Ancon Shearfix

Used within a slab to provide additional reinforcement around columns, Ancon Shearfix is the ideal solution to the design and construction problems associated with punching shear.

The system consists of double-headed studs welded to flat rails, positioned around the column head or base. The shear load from the slab is transferred through the studs into the column.

Shearfix is suitable for all column shapes and is easy to install either 'top down' or 'bottom up', depending on user preference.

Technical Approval

Shearfix has been evaluated by UK CARES for use in reinforced concrete slabs and footings designed in accordance with BS EN 1992 (Eurocode 2).



Comparison with Shear Links

Ancon Shearfix offers many advantages over loose shear links. Links can be time-consuming to both design and install. A Shearfix system is easily detailed with Ancon's free calculation program which generates a layout drawing for inclusion in the building plans and, rather than being installed individually, these studs are supplied to site welded to rails at the appropriate spacing.

When comparing links with studs, research has shown that any additional material costs incurred when purchasing a prefabricated stud system, such as Shearfix, are generally far outweighed by the savings from a significantly reduced fixing time; these systems being up to ten times quicker to install (source: *British Cement Association: Prefabricated punching shear reinforcement for reinforced concrete flat slabs. BCA, Camberley, 2001*).

Details for Specifying/Ordering

Shearfix systems are designed to suit the specific load conditions at individual columns and are therefore manufactured to order. To specify and order an Ancon Shearfix system, download the free design program at www.ancon.co.uk or contact Ancon for technical support.

The Ancon design program generates a 16 digit reference code, which can be used to specify/order Shearfix. Alternatively, should you wish to manually specify each rail of studs please use the following referencing system.

e.g AS12-3-150-180

Where,

AS = Shearfix Code
12 = Stud Diameter (mm)
3 = Number of studs
150 = Stud length (mm)
180 = Stud spacing (mm)

Note: Rail supplied with end distance equivalent to $0.5d$ (d = effective slab depth) where spacing is $0.75d$ ($0.6667 \times \text{spacing}$). Other end distances available upon request.

Building Information Modelling (BIM)

For a BIM Object of the Shearfix system, please visit www.ancon.co.uk/BIM or the NBS National BIM Library.



Project Management

Please contact Ancon if you would like help in creating a Shearfix schedule and a programme for delivery to suit progress on site. If advised at the time of ordering, pallets can be packed in priority order e.g by pour number.

Ancon's 'Products for Structural Concrete' division offers a dedicated service to the concrete sector. Contact the team on +44 (0) 114 238 1410 with your Shearfix enquiry.


Shearfix



Corner column


System Components

The Ancon Shearfix system comprises double-headed studs welded to flat rails. It is manufactured to suit the specific requirements of each application. The quantity of each component, the dimensions and spacings, and the layout pattern around the column are determined by calculation. Ancon provides free software to determine the optimum system design (see pages 8-9).

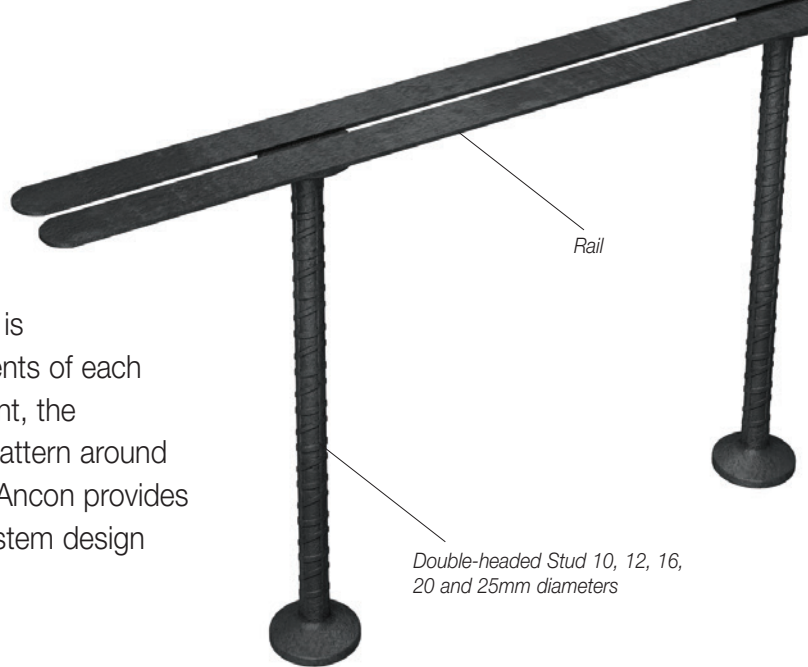

Shearfix Studs

Studs are manufactured in five diameters (10, 12, 16, 20 and 25mm) from CARES-approved B500C reinforcing bar. The heads are hot forged to three times the diameter of the bar. Studs are manufactured in virtually any length to suit the depth of slab, but are normally

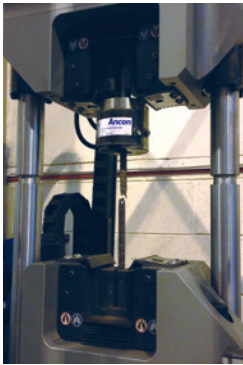

formed in increments of 5mm within the 130-1000mm range. The bar used in this system has a characteristic yield strength of 500N/mm². The first and last stud from each production batch is tested in-house to ensure the correct mechanical properties are maintained.

Shearfix Rails

The studs are welded to the rail at the centres determined by Ancon's software or a design calculation. The rail performs no structural function but ensures stud alignment and positioning within the slab.

Shearfix rails are manufactured from strips of steel which are 16mm wide x 3mm thick on studs up to 16mm in diameter and 20mm x 5mm on the larger two stud diameters. The rails feature rounded ends to reduce the risk of injury during handling. The gap between the strips allows for the passage of concrete during pouring and also enables the rail to be nailed through spacers to formwork when fixed 'bottom up' i.e. prior to all other reinforcement.

Spacer Bars (Optional)

Spacer bars should be used with 'top down' fixing of rails which run parallel to T1 reinforcement. The spacer bars are tied to the main T2 reinforcement where it is necessary to raise the level of the studs as if placed on T1 bars.

Product Identification

Each rail of studs carries an identification code generated by the Ancon design program. To ensure the products and documentation can be cross-checked, these 16 digit reference codes are used throughout the process from design to installation. They appear on the calculation summary sheet, the DXF layout file, the parts list and on each physical rail when delivered to site.


Rails also include other references such as column number or floor level if provided at the time of ordering.



Radial Layout Installation



'Top down' installation. Rail is tied to the main reinforcement

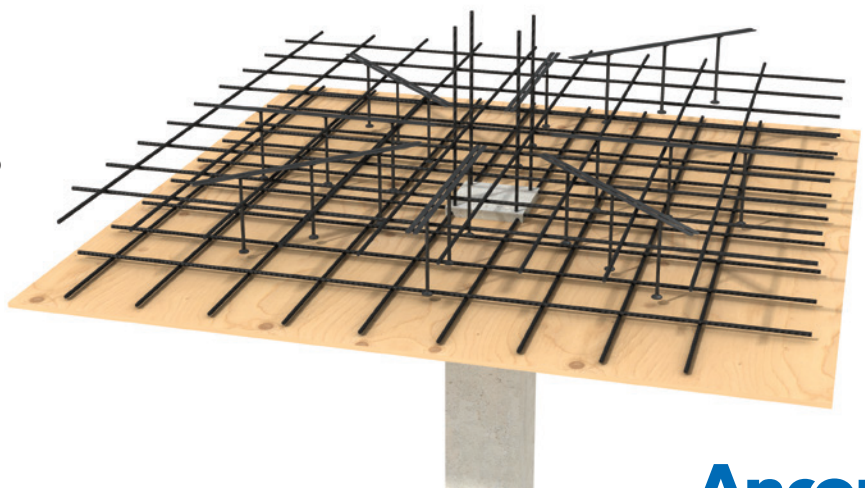

Shearfix Punching Shear Reinforcement

Design Information: BS EN 1992 (Eurocode 2)

The design of punching shear reinforcement is typically carried out in accordance with the recommendations contained in BS EN 1992 (Eurocode 2). Shearfix designed to BS EN 1992 can also be applied to structures designed to BS 8110.

The shear stress in the concrete is calculated at the column face and at the basic control perimeter u_1 ($2d$ from the column face) to determine whether punching shear reinforcement is required.


If reinforcement is required, the position of the outer control perimeter at which shear reinforcement is no longer needed (u_{out}) is then calculated. Studs are arranged to start at $0.3d$ or $0.5d$ from the column face to within $1.5d$ of the outer control perimeter (u_{out}); intermediate studs are positioned at $0.75d$ centres. The Ancon software defaults to a stud start point of $0.5d$, although $0.3d$ is available as an option.

A radial layout will normally provide the most cost-effective solution and rails can be arranged with either 30° or 45° between them. Cruciform rail layout is also an option. The tangential spacing between studs is kept to within $1.5d$ for studs within the basic control perimeter (u_1) and $2d$ for studs outside the basic control perimeter; additional secondary rails are added as necessary to comply with this requirement.

For internal, edge and corner columns where lateral stability does not depend on frame action between slabs and columns, and where adjacent spans differ by less than 25%, the recommended β values from BS EN 1992 can be applied to the design shear load V_{Ed} . However, β values are most accurately determined on a case-by-case basis, taking the column location, geometry and loading conditions into account. In the Ancon software, by applying the moments, the program calculates these β values automatically. Alternatively, the β values can be calculated manually and input directly into the program.

Openings in the slab

Where there are openings in the slab within $6d$ of the column face, a section of the slab will

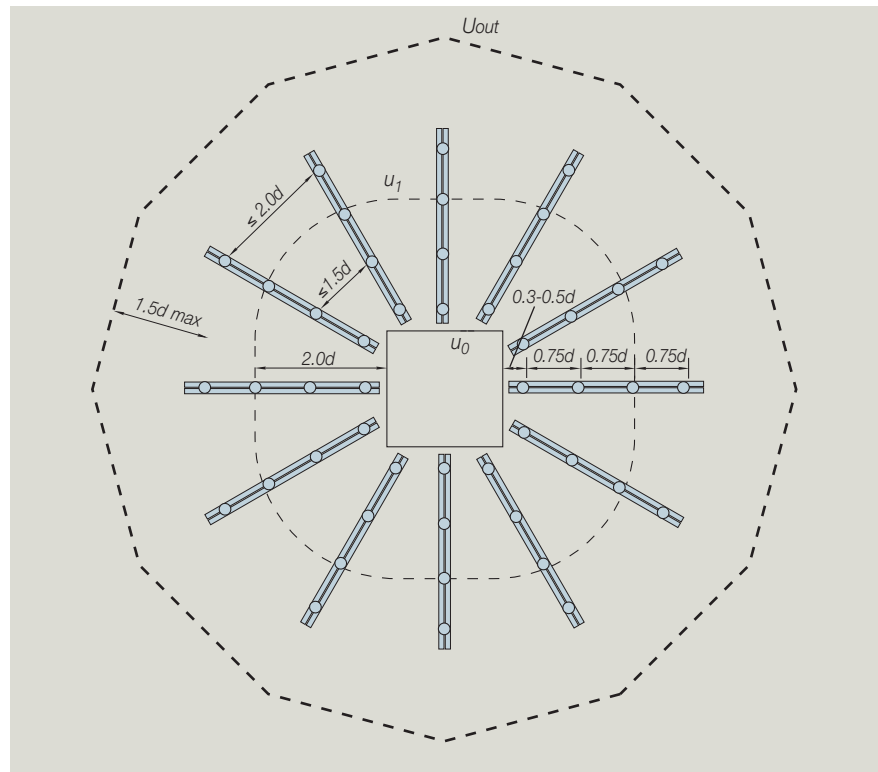



be ineffective and the perimeter lengths will be reduced. A series of rectangular or circular openings can be added around each column using the Ancon design program which then calculates the required punching shear reinforcement.

Design Manual

An Ancon Shearfix manual to BS EN 1992 (EC2) is available. Contact Ancon for a copy.

Design Sheet

In addition to the Shearfix design program (see pages 8-9), a design sheet is available to download from www.ancon.co.uk, which allows engineers to summarise the critical details of their project and request technical assistance with a Shearfix design.

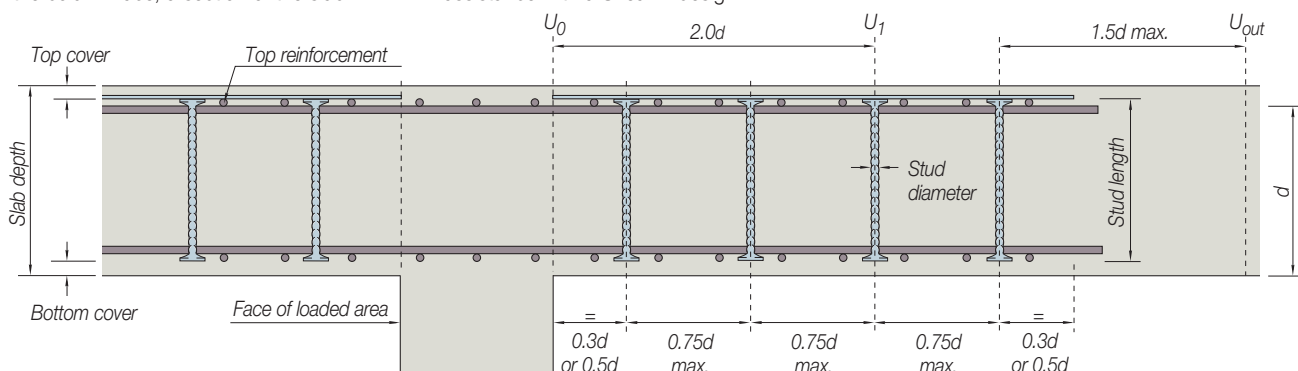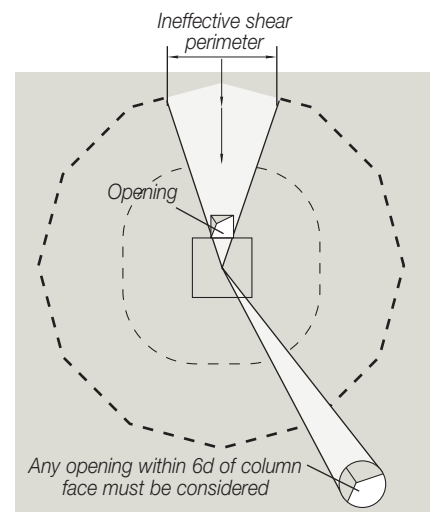


Large and Elongated Columns

Research¹ suggests that punching shear stresses are greater at column corners than along column edges. This effect is more pronounced for larger or elongated columns. The current Eurocode does not explicitly recognise this effect, although the latest Model Code 2010² and other publications do. The only limit in the current Eurocode is the aspect ratio which differentiates a column from a wall, i.e. 1:4 (BS EN 1992-1-1, 9.5.1).

Ancon's design program allows the designer to select between two options for dealing with large and elongated columns: "EC2" and "Best Practice". Ancon recommends "Best Practice" which reflects latest research findings and the rules in the widely-accepted Model Code 2010, as we believe this to produce a more accurate design. Both options provide valid solutions, however there may be differences to the length and number of rails.

EC2

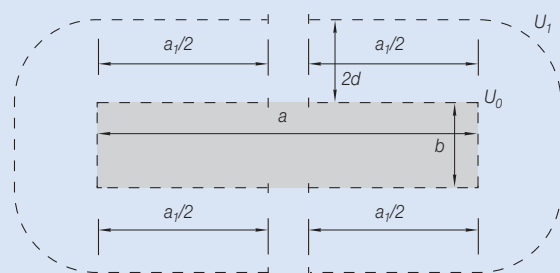


Where:

$$a_1 = \min(a, 4b)$$

$$u_0 = 2a_1 + 2b$$

$$u_1 = 2a_1 + 2b + 4\pi d$$

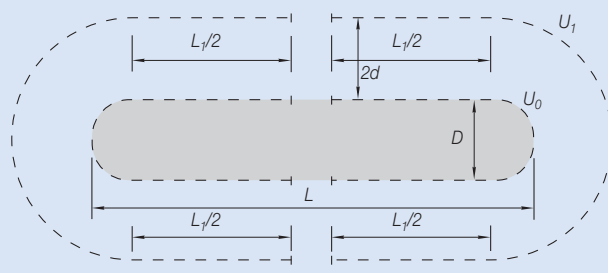


Where:

$$L_1 = \min(L - D, 3D)$$

$$u_0 = 2L_1 + \pi D$$

$$u_1 = 2L_1 + \pi(D + 4d)$$

Best Practice

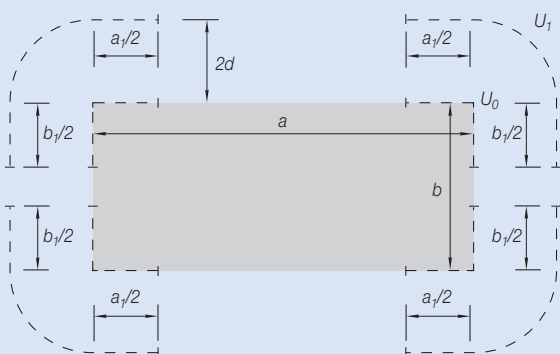


Where:

$$a_1 = \min(a, 4b, 3d)$$

$$b_1 = \min(b, 3d)$$

$$u_0 = 2a_1 + 2b_1$$

$$u_1 = 2a_1 + 2b_1 + 4\pi d$$

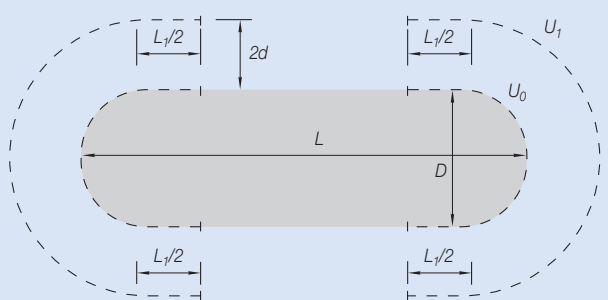

Where:

$$L_1 = \min(L - D, 3D, 3d)$$

$$u_0 = 2L_1 + \pi D$$

$$u_1 = 2L_1 + \pi(D + 4d)$$

There is no limit to the perimeter length effective in resisting punching shear of a circular column as a circular column has no ends or corners at which the shear stresses could focus.

¹ Einpaul, J., Bujnak, J., Fernandez Ruiz, M. and Muttoni, A. (2016). "Study on Influence of Column Size and Slab Slenderness on Punching Strength" ACI Structural Journal, V. 113, No. 1, pp. 135-146

² fib (2013). 7.3.5 Punching, Model Code for Concrete Structures 2010, pp.227-234

Shearfix Punching Shear Reinforcement

Design Program (2018 Version 5 Release)

Shearfix is designed to suit the specific requirements of each application. Ancon provides a free design program to simplify the specification and ordering of a Shearfix system. An advanced version of this software was released in 2018, version 5.

This easy-to-use program allows the optimum system design to be determined and generates a printable calculation sheet, a DXF file and a parts list of the specified layout. Solutions can be created for a wide range of column sizes, shapes and locations including columns offset from edges and corners.

The following combinations of column shape and location are permissible in the Ancon Shearfix Design Program.

Column location	Column shape		
	Rectangular	Circular	Oval
Internal	✓	✓	✓
Edge	✓	✓	✓
Corner	✓	✓	✓
Re-entrant corner	✓	✓	✗
Wall corner	✓	✗	✗
Wall end	✓	✗	✗

The program allows analysis to BS EN 1992 (Eurocode 2).

Where there are openings close to the column, a section of the slab will be ineffective and perimeters will need to be reduced; the Ancon design program allows these reductions to be applied to each perimeter.


The program requires the following information and is requested in a logical sequence as the user works through the 'input' tabs:

- Column shape (circular, rectangular or oval)
- Column dimensions
- Column location (interior, edge, external corner, re-entrant corner, wall corner, wall end)
- Dimension to concrete edge (for offset corner and edge columns)
- Slab thickness
- Concrete grade
- Reinforcement size and spacing
- Cover to reinforcement
- Size and location of slab openings
- Shear load
- Applied moments

This free program can be downloaded from www.ancon.co.uk or emailed on request. Contact Ancon on +44 (0) 114 275 5224 or info@ancon.co.uk.

Latest Features of the Ancon Shearfix Design Program

Project Management

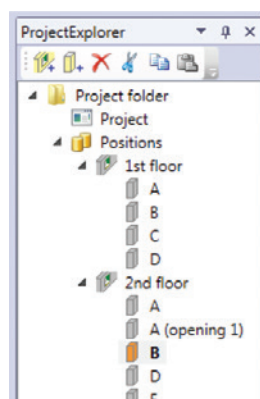

The Ancon Shearfix Design Program contains a calculation management tool, allowing multiple column locations to be designed within a single project file. The calculations can be arranged in a system of sub-directories to ease project management. When exporting design information, any number of column locations can be included in a bulk export as a PDF calculation report, a DXF file or a PDF parts list.

Automatic β Value Calculation

The load eccentricity factor, β , can be automatically calculated for any column shape or location, provided that the designer inputs the applied design moments.

Interactive 2D Graphic Display


A clear 2D graphic automatically updates as data is entered, illustrating the column and opening dimensions, and the locations of openings relative to the column. Each dimension can be edited via the 2D graphic or via the main input window. Furthermore, it is possible to 'grab and drop' the openings via the 2D graphic.

Slab Openings



Any number of rectangular and circular slab openings can be applied to a design calculation and the software arranges the design solution to suit.

Slab Reinforcement

Where structures contain multiple layers of tensile slab reinforcement, the software will automatically calculate the effective slab depth and reinforcement ratio associated with these (a maximum of two layers of tensile reinforcement in each orthogonal direction can be accommodated).

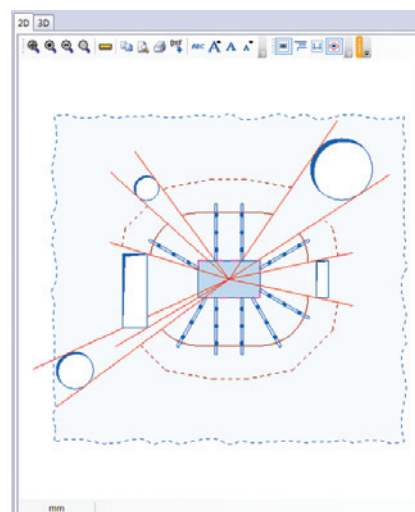


Example of multiple openings

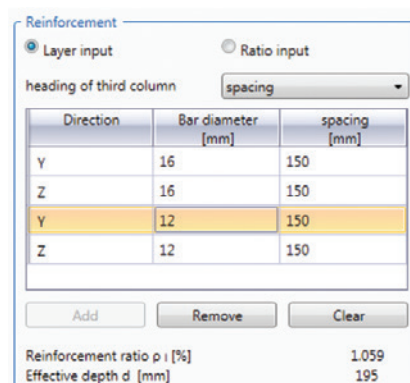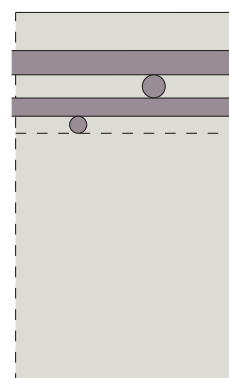


Example of multiple reinforcement layers

Help File


A help file can be accessed by clicking the 'Help' icon within the design program or call Ancon on +44 (0) 114 238 1410 for advice.




Radial Design Example

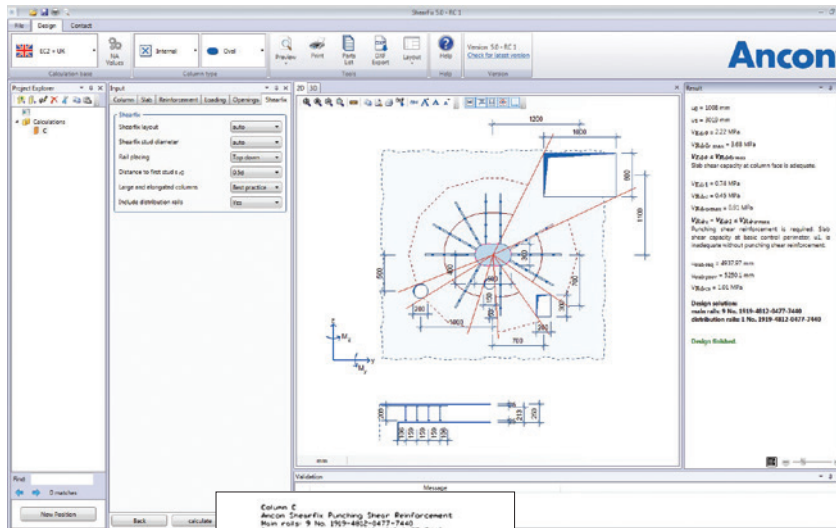


Screenshot of an oval, internal column with a radial stud layout



The DXF file generated

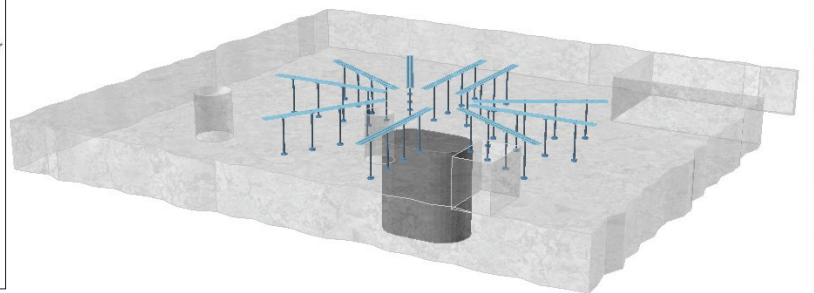


3D view in software

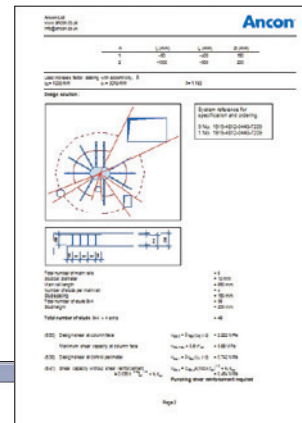


The PDF datasheet generated


Cruciform Design Example

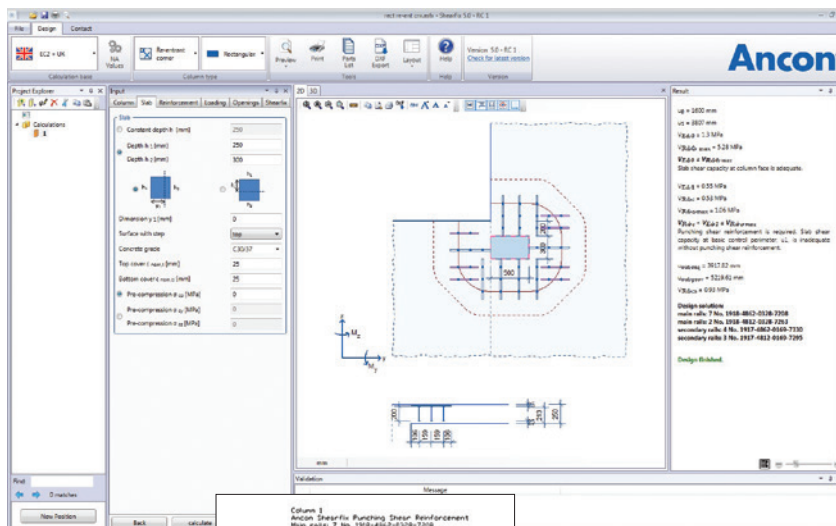


Screenshot of a rectangular column at a re-entrant corner, with a cruciform stud layout

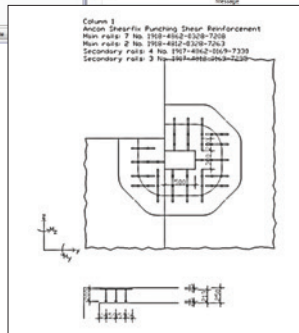

The DXF file generated

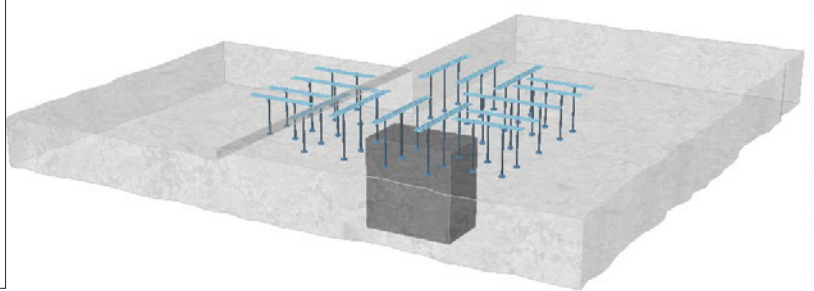

3D view in software

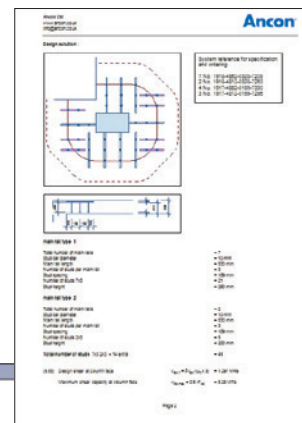


The PDF datasheet generated

Shearfix Punching Shear Reinforcement


Typical Rail Arrangements

Shearfix is suitable for a wide range of column shapes and locations. Some typical arrangements are shown here.

Radial Layouts

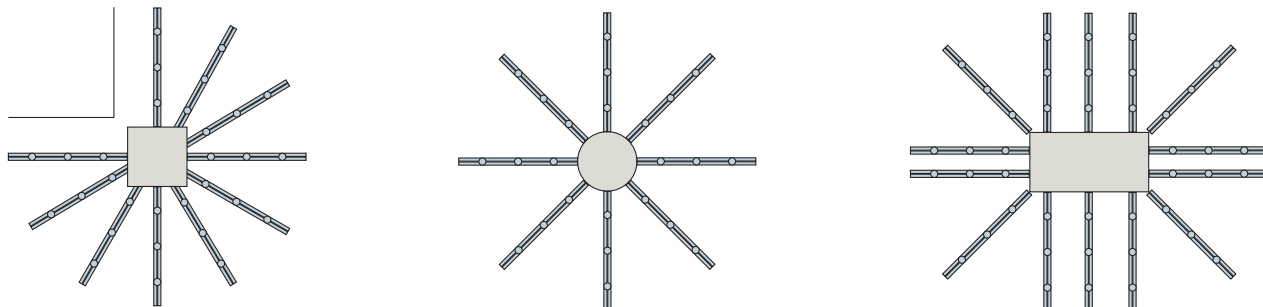

Cruciform Layouts

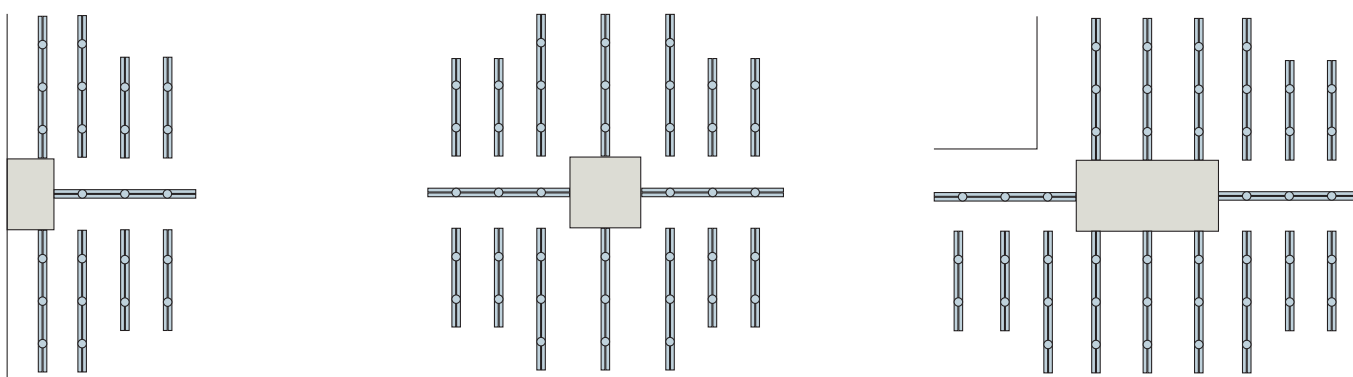


Installation Procedure

Ancon Shearfix is quick and simple to install. It can be fitted either 'top down' (after all other reinforcement) or 'bottom up' (prior to other reinforcement).


'Top Down' Fixing

- Fix all main reinforcement in position
- Place Shearfix rails around the column to the layout detailed on job drawings by passing the studs through the reinforcement grid and resting the carrier rails on the top layer of reinforcement. Use spacer bars where required – see page 5 for details
- Tie rails with wire to main reinforcement and pour concrete

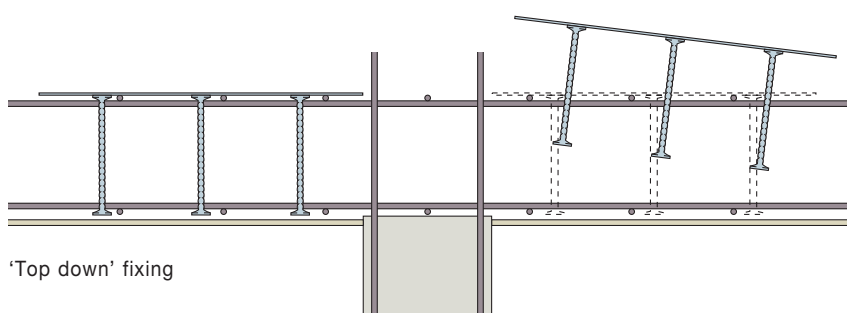

'Bottom Up' Fixing

- Tie rails with wire to concrete spacers in order to maintain cover
- Place rail and spacer units around the column to the layout detailed on job drawings
- Hammer nails through gap in rails to fix the system to formwork
- Fix main reinforcement in position and pour concrete taking care not to displace the studs

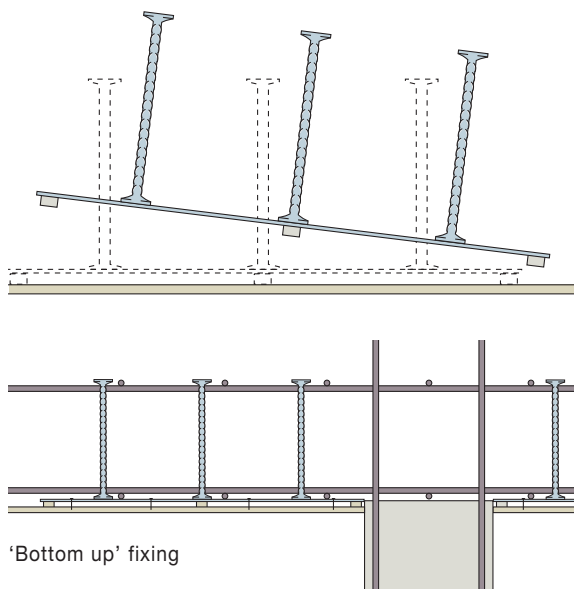

Applications



Photo: University of Derby

Markeaton Street, Derby, UK



Photo: Joas Souza

Riverlight, London, UK



Photo: Donal McCann

Ulster Hospital, Belfast, Northern Ireland

Other Ancon Products

Reinforcing Bar Couplers

The use of reinforcing bar couplers can provide significant advantages over lapped joints. Design and construction of the concrete can be simplified and the amount of reinforcement required can be reduced. The Ancon range includes parallel threaded, tapered threaded, mechanically bolted and grouted couplers.



Reinforcement Continuity Systems

Ancon Eazistrip is approved by UK CARES and consists of bent bars housed in a galvanised steel casing. Once installed, the protective cover is removed and the bars are straightened, ready for joining to the slab reinforcement. Alternatively, Ancon KSN Anchors are cast into the wall and, when the formwork and thread protection are removed, Bartec Plus threaded rebars are simply screwed into the anchors.



Insulated Balcony Connectors

Ancon's thermally insulated connectors minimise heat loss at balcony locations while maintaining structural integrity. They provide a thermal break and most also provide local insulation at the joint. As a critical structural component they transfer moment, shear, tension and compression forces. Standard solutions are available for concrete-to-concrete, steel-to-concrete and steel-to-steel applications.



Shear Load Connectors

Ancon DSD and ESD Shear Load Connectors are used to transfer shear across expansion and contraction joints in concrete. They are more effective at transferring load and allowing movement to take place than standard dowels, and can be used to eliminate double columns at structural movement joints in buildings.



Channel and Bolt Fixings

Ancon offers a wide range of channels and bolts in order to fix stainless steel masonry support, restraints and windposts to structural frames. Cast-in channels and expansion bolts are used for fixing to the edges of concrete floors and beams.



Special Fabrications

Ancon designs and manufactures high integrity steel components for a wide range of industries including Civil Engineering, Building, Infrastructure, Water Treatment, Nuclear and Mining. Projects are supplied worldwide and range from small-scale residential developments to major infrastructure projects.



Masonry Support Systems
 Lintels
 Masonry Reinforcement
 Windposts and Parapet Posts
 Wall Ties and Restraint Fixings
 Channel and Bolt Fixings
 Tension and Compression Systems
 Insulated Balcony Connectors
 Shear Load Connectors
Punching Shear Reinforcement
 Reinforcing Bar Couplers
 Reinforcement Continuity Systems
 Stainless Steel Fabrications
 Flooring and Formed Sections
 Refractory Fixings



Ancon®

Ancon Ltd
 President Way, President Park
 Sheffield S4 7UR
 United Kingdom
 Tel: +44 (0) 114 275 5224
 Fax: +44 (0) 114 276 8543
 Email: info@ancon.co.uk
 Visit: www.ancon.co.uk

Ancon Building Products
 98 Kurrajong Avenue
 Mount Druitt
 Sydney NSW 2770
 Australia
 Tel: +61 (0) 2 8808 3100
 Fax: +61 (0) 2 9675 3390
 Email: info@ancon.com.au
 Visit: www.ancon.com.au

Ancon (Schweiz) AG
 Grenzstrasse 24
 3250 Lyss
 Switzerland
 Tel: +41 (0) 31 750 3030
 Fax: +41 (0) 31 750 3033
 Email: info@ancon.ch
 Visit: www.ancon.ch

Ancon GmbH
 Bartholomäusstrasse 26
 90489 Nuremberg
 Germany
 Tel: +49 (0) 911 955 1234 0
 Fax: +49 (0) 911 955 1234 9
 Email: info@anconbp.de
 Visit: www.anconbp.de

Ancon (Middle East) FZE
 PO Box 17225
 Jebel Ali
 Dubai
 United Arab Emirates
 Tel: +971 (0) 4 883 4346
 Fax: +971 (0) 4 883 4347
 Email: info@ancon.ae
 Visit: www.ancon.ae

Ancon Building Products
 2/19 Nuttall Drive
 Hillsborough
 Christchurch 8022
 New Zealand
 Tel: +64 (0) 3 376 5205
 Fax: +64 (0) 3 376 5206
 Email: info@ancon.co.nz
 Visit: www.ancon.co.nz

**Ancon Building Products
GesmbH**
 Puchgasse 1
 A-1220 Vienna
 Austria
 Tel: +43 (0) 1 259 58 62-0
 Fax: +43 (0) 1 259 58 62-40
 Email: info@ancon.at
 Visit: www.ancon.at

These products are available from:

© Ancon

The construction applications and details provided in this literature are indicative only. In every case, project working details should be entrusted to appropriately qualified and experienced persons.

Whilst every care has been exercised in the preparation of this document to ensure that any advice, recommendations or information is accurate, no liability or responsibility of any kind is accepted in respect of Ancon.

With a policy of continuous product development Ancon reserves the right to modify product design and specification without due notice.

