


Simplicity

| | |
|---|----------------------------------|
| A Minimum swivel radius – with short arm | 680mm 644mm |
| B Minimum wall to seat back | 75mm |
| C Seat depth | 370mm |
| D Minimum folded width to footplate | 285mm |
| E Minimum open width to edge of footplate | 580mm |
| F Armrest width – external | 625mm |
| G Armrest width – internal | 480mm |
| H Seat back height | 400mm |
| I Footplate to seat height – standard seat option – extended seat post | 390-490mm 460-560mm |
| J Minimum footplate height | 50mm |
| Bottom parking space required | 660mm [†] |
| Minimum track intrusion into staircase | 160mm |
| Minimum track intrusion into top landing (typical at 45°) | 150mm* |
| Maximum weight limit – Hinge/Slide Track | 140kg/22 stone 120kg/19 stone |
| Speed | 0.12m/sec (approx) |
| Power supply | 24v DC battery |
| Charger | 240v |
| Staircase angle | 27-50° |

[†]Increases by up to 140mm with zero intrusion kit.
*A 0mm track intrusion kit is available.

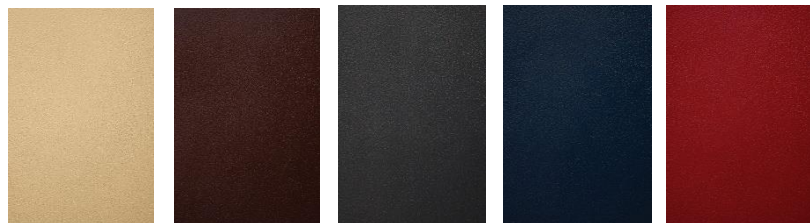

Color options on seat



KONTAKT
 www.mprlift.nu
 E-post: info@mprlift.nu
 Telefon: 040-43 70 75
 Adress: Ävägen 4, SE-232 91 Arlöv