


VT-MSH Ceiling System


Multi Spring Hanger

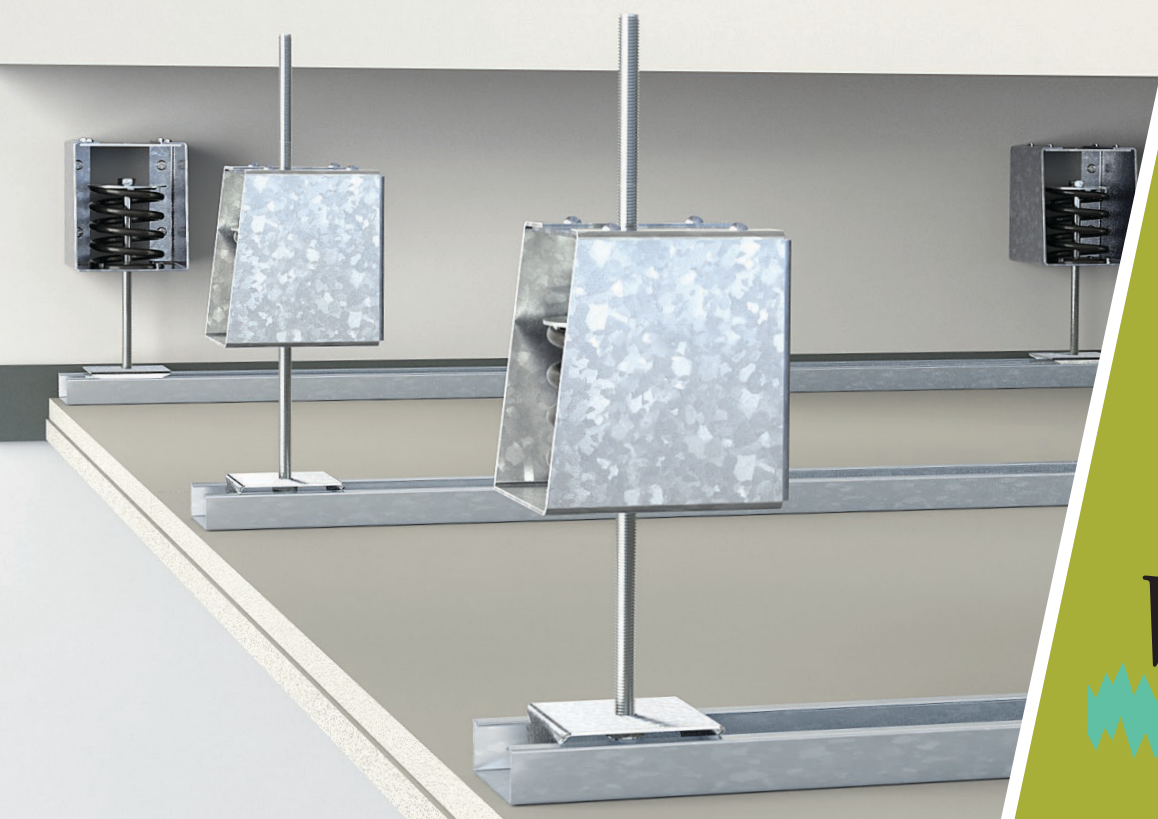

Vibratec[®]
akustikprodukter

VT-MSH Ceiling System

Multi Spring Hanger

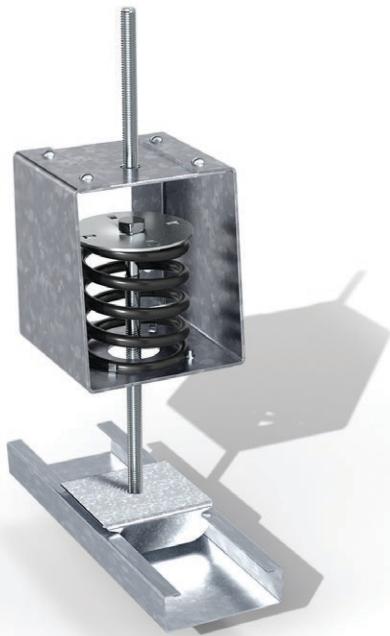

Description

The VT-MSH Spring Hanger is designed for both top or back mounting. It could be used together with Vibratec click-on hangers and profiles for ceiling suspension, or as it is for hanging equipment such as speakers, pipes or ventilation.

For beam structures, back mounting of the hangers could reduce the total height of the system.

When a longer distance between ceiling and hanger is needed threaded rods could be used instead of bolts.




Elastically suspended ceilings must also be de-coupled from surrounding walls by using for instance self adhesive elastic strip VT-STRIP.

Screws, threaded bars, click-ons and ceiling profiles are not a part of the product and need to be ordered separately.

VT-MSH
Top-mounted

VT-MSH
Back-mounted

VT-MSH
Top-mounted
With click-on system

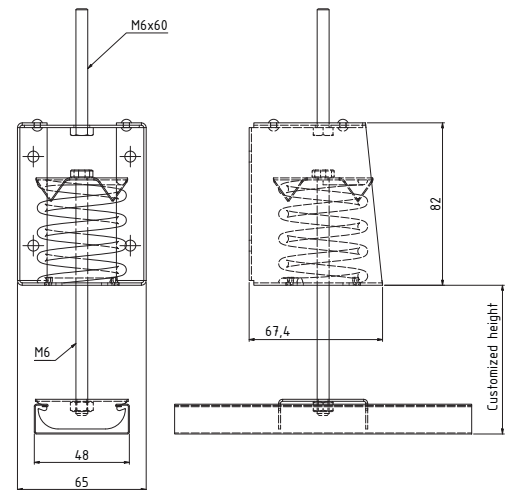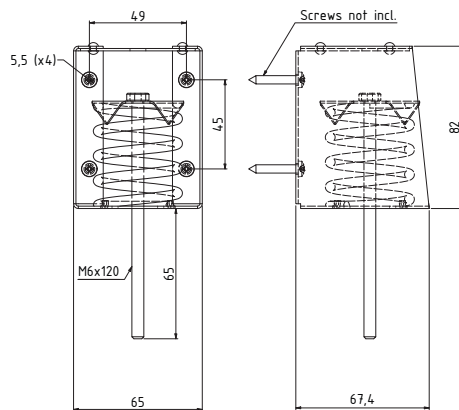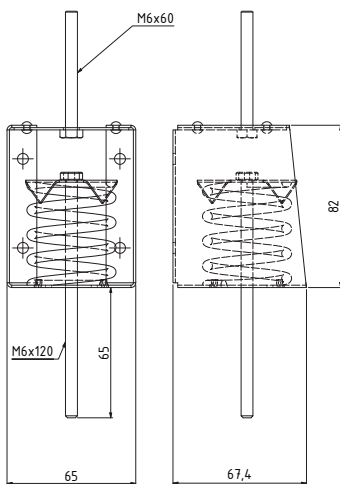

Type	Load (kg)	Spring rate (N/mm)	F _n (Hz)
VT-MSH-S-1	5 - 7	6	4 - 5
VT-MSH-S-2	6 - 9	7.6	
VT-MSH-S-3	9 - 13	10.7	
VT-MSH-S-4	13 - 20	17.5	
VT-MSH-S-5	20 - 30	27	
VT-MSH-S-6	30 - 50	39.7	

Sweden
Tel: +46 176 20 78 80
e-mail: info@vibratec.se

Norway
Tel: +47 33 07 07 50
e-mail: info@vibratec.no

Denmark
Tel: +45 49 13 22 44
e-mail: info@vibratec.dk

Estonia
Tel: +372 56 66 29 93
e-mail: info@vibratec.ee